

2VA EI 30-15.5 EI3015 Series

50/60Hz PCB Mount Transformers

Meisongbei



Features


- Vacuum filling
- Two compartments bobbins
- Self-extinguishing plastics UL 94 VO
- Degree of protection IP 00
- 100 grams weight



Applications


- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom

Physical Characteristics (Unit: mm)

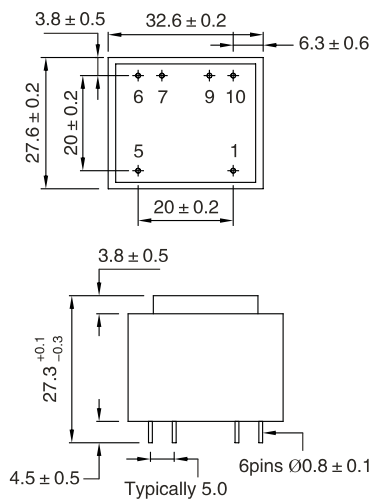

Technical Information

- Resin class B CEI 85 (20000 h testing to CEI 126)
- Inherently short-circuits proof transformer
- 30 V model is VDE EN61558-2-6 certified (production on request)
- Insulation voltage 4 KV
- 100% tested production
- Certification : CCA procedure on request

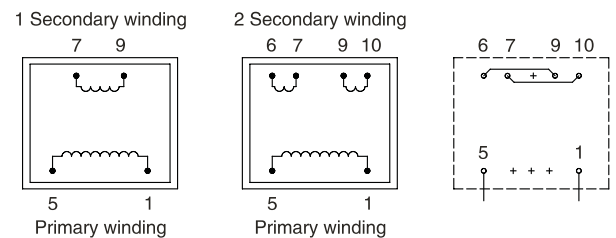

Recommended Drill-hole Diameter for 1.3mm pins

Electrical Characteristics

Primary Voltage: 230						Primary Voltage: 115					
Part Number	Secondary voltage (V)	Secondary Current (mA)	No-load voltage (V)	Ambient Temperature (°C)	Rating (VA)	Part Number	Secondary voltage (V)	Secondary Current (mA)	No-load voltage (V)	Ambient Temperature (°C)	Rating (VA)
EI301501	6	333	10.4	T70B	2	EI301513	6	333	10.4	T70B	2
EI301502	9	222	15.5	T70B	2	EI301514	9	222	15.5	T70B	2
EI301503	12	167	20.7	T70B	2	EI301515	12	167	20.7	T70B	2
EI301504	15	133	25.8	T70B	2	EI301516	15	133	25.8	T70B	2
EI301505	18	111	30.8	T70B	2	EI301517	18	111	30.8	T70B	2
EI301506	24	83	41.4	T70B	2	EI301518	24	83	41.4	T70B	2
EI301507	2 x 6	2 x 167	2 x 10.4	T70B	2	EI301519	2 x 6	2 x 167	2 x 10.4	T70B	2
EI301508	2 x 9	2 x 111	2 x 15.4	T70B	2	EI301520	2 x 9	2 x 111	2 x 15.4	T70B	2
EI301509	2 x 12	2 x 83	2 x 20.7	T70B	2	EI301521	2 x 12	2 x 83	2 x 20.7	T70B	2
EI301510	2 x 15	2 x 67	2 x 25.8	T70B	2	EI301522	2 x 15	2 x 67	2 x 25.8	T70B	2
EI301511	2 x 18	2 x 56	2 x 30.8	T70B	2	EI301523	2 x 18	2 x 56	2 x 30.8	T70B	2
EI301512	2 x 24	2 x 42	2 x 41.4	T70B	2	EI301524	2 x 24	2 x 42	2 x 41.4	T70B	2