0.35VA Encapsulated Transformers - EE2006 Series

Meisongbei



Features

- Frequency 50/60Hz
- Vacuum Filling
- Split Bobbin Design
- Self-Extinguishing Plastics UL94V-0
- Dielectric Strength 4200Vrms
- Class B (130°C) Insulation material
- 100%ProductionTested
- Operating temper range: -40°C to +70°C

Applications

- Medical equipments
- Industrial equipments
- Test equipments
- Avionics & telecom

RoHS COMPLIANT | REACH COMPLIANT | Halogen Free

Physical Characteristics (Unit: mm)

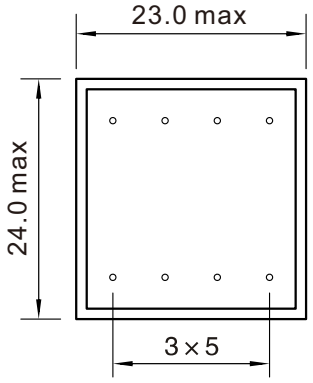

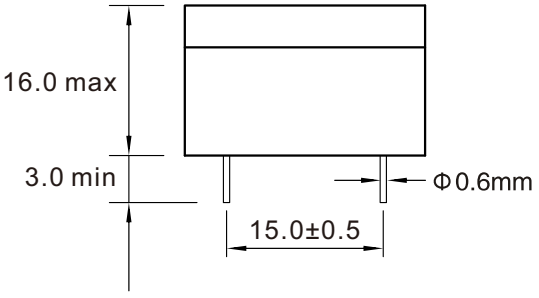



Fig 1



Fig 2

Electrical Characteristics For EE20-6.1 Series

Part Number	Primary (V)	Secondary (V/mA)	No-load voltage (V)	Fig.
EE200601	230	6 / 58.0	10.8	1
EE200602	230	9 / 39.0	16.5	1
EE200603	230	12 / 29.0	21.9	1
EE200604	230	15 / 23.0	27	1
EE200605	230	18 / 19.0	31.5	1
EE200606	230	24 / 14.0	41.7	1
EE200607	230	2 x 6 / 29.0	2 x 10.95	2
EE200608	230	2 x 9 / 19.0	2 x 15.60	2
EE200609	230	2 x 12 / 14.0	2 x 20.70	2
EE200610	230	2 x 15 / 12.0	2 x 26.00	2
EE200611	230	2 x 18 / 9.5	2 x 31.20	2
EE200612	230	2 x 24 / 7.0	2 x 41.90	2

Part Number	Primary (V)	Secondary (V/mA)	No-load voltage (V)	Fig.
EE200613	115	6 / 58.0	10.8	1
EE200614	115	9 / 39.0	16.5	1
EE200615	115	12 / 29.0	21.9	1
EE200616	115	15 / 23.0	27	1
EE200617	115	18 / 19.0	31.5	1
EE200618	115	24 / 14.0	41.7	1
EE200619	115	2 x 6 / 29.0	2 x 10.95	2
EE200620	115	2 x 9 / 19.0	2 x 15.60	2
EE200621	115	2 x 12 / 14.0	2 x 20.70	2
EE200622	115	2 x 15 / 12.0	2 x 26.00	2
EE200623	115	2 x 18 / 9.5	2 x 31.20	2
EE200624	115	2 x 24 / 7.0	2 x 41.90	a