3 Pin Through Hole Boost Inductor - MC3W Series

Meisongbei

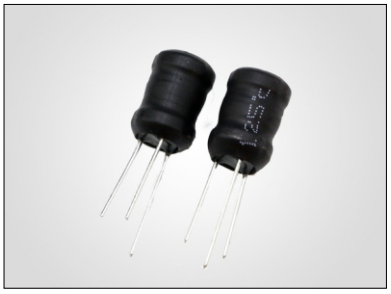

Features

- Inductor for buzzers & alarm system.
- Low cost
- Covered with UL tube.
- RoHS, Halogen Free and REACH compliance

General Specifications

- Storage temp range: -40°C to +80°C
- Operating temp range: -40°C to +80°C

RoHS COMPLIANT | REACH COMPLIANT | Halogen Free

Dimensions & Configurations (Unit:mm)

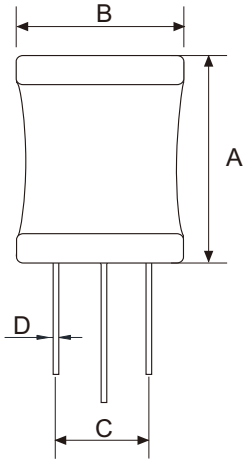





Schematic

Type	A max	B max	C ± 1.0	D ± 0.5
MC3W0608	11.0	7.5	3.0	0.65
MC3W0810	13.0	9.5	4.0	0.65
MC3W0912	15.0	10.5	5.0	0.65
MC3W1012	16.0	11.5	6.0	0.80
MC3W1016	20.0	12.0	6.0	0.80
MC3W1415	19.0	16.0	7.5	1.00