

10VA EI 48-16.8 EI4816 Series

50/60Hz PCB Mount Transformers

Meisongbei



Features

- Vacuum filling
- Two compartments bobbins
- Self-extinguishing plastics UL 94 VO
- Degree of protection IP 00
- 300 grams weight







Applications

- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom

Physical Characteristics (Unit: mm)

Schematics

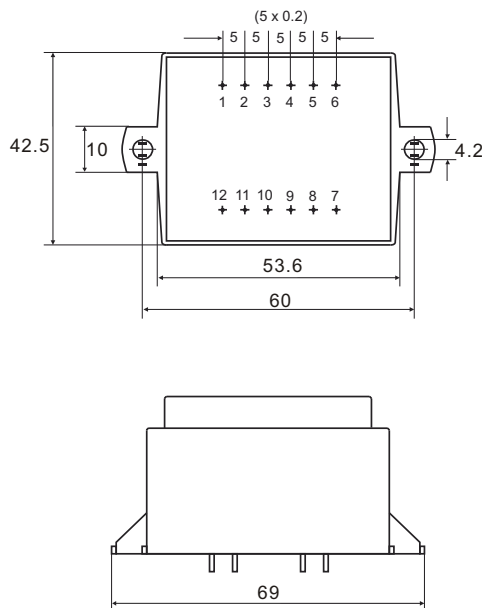

Electrical Characteristics

Primary Voltage: 230V

| Part Number | Secondary voltage (V) | Secondary Current (mA) | No-load voltage (V) | Fig | Ambient Temperature (°C) | Rating VA |
|-------------|-----------------------|------------------------|---------------------|-----|--------------------------|-----------|
| EI481601 | 6 | 1666 | 7.9 | 1 | T40B | 10 |
| EI481602 | 9 | 1111 | 12 | 1 | T40B | 10 |
| EI481603 | 12 | 834 | 15.7 | 1 | T40B | 10 |
| EI481604 | 15 | 666 | 19.2 | 1 | T40B | 10 |
| EI481605 | 18 | 555 | 22.9 | 1 | T40B | 10 |
| EI481606 | 24 | 416 | 30.6 | 1 | T40B | 10 |
| EI481607 | 2 x 6 | 2 x 834 | 2 x 7.9 | 2 | T40B | 10 |
| EI481608 | 2 x 9 | 2 x 555 | 2 x 12.0 | 2 | T40B | 10 |
| EI481609 | 2 x 12 | 2 x 416 | 2 x 15.7 | 2 | T40B | 10 |
| EI481610 | 2 x 15 | 2 x 333 | 2 x 19.2 | 2 | T40B | 10 |