

# 10/100 Base-T Dual Port Transformer

- Cw/w: 50PF Typ @ 100KHz, 0.2V
- Polarity: 1-20, 4-17, 6-15, 9-12, In-Phase
- LL: 0.5uH Max @ 100KHz, 0.2V
- DCR: 0.9Ω Max
- Operating Temp: 0°C to +70°C


## Electrical Specifications @25°C

Part Number	OCL(uH Min) @ 100kHz, 200mV	Turns Ratio chip: cable (±5%)	Insertion Loss (dB Max)	Return Loss (dB Min)				
	With 8mA DC Bias			0.3-100MHz	0.3-30MHz	40MHz	50MHz	60-80MHz
MHTA-2001S	350	1CT:1CT(TX)/1CT:1CT(RX)	-1.1	-18	-14.4	-13.1	-12	

## Electrical Specifications @25°C

Part Number	Common Mode Rejection (dB Min)			Cross Talk (dB Min)		Isolation HI-POT (Vrms) 60S
	0.3-30MHz	60MHz	80-100MHz	0.3-30MHz	60-100MHz	
MHTA-2001S	-40	-35	-30	-42	-33	1500

## MECHANICAL

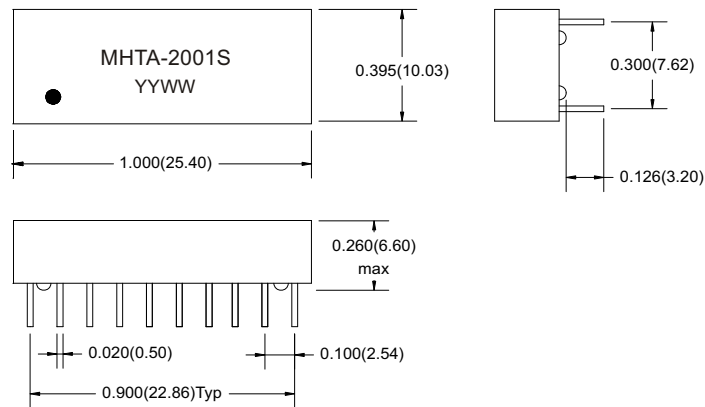

Dimensions: inch (mm)  
Unless otherwise specified, all tolerances are ±0.010(0.25)

## SCHEMATICS

