

# 100/1000 Base T Gigabit Dual Port Transformer

- Polarity: 2-47, 5-44, 8-41, 11-38, 14-35, 17-32, 20-29, 23-26 In-Phase
- LL: 0.5uH Max @ 100KHz, 200mV
- DCR: 0.9Ω Max
- Cw/w: 25PF TYP @ 100KHz, 200mV
- Operating Temp: 0°C to +70°C


## ▶ Electrical Specifications @25°C

Part Number	OCL(uH Min) @ 100kHz, 0.2V	Turns Ratio chip: cable (±5%)	Insertion Loss (dB Max)					Return Loss (dB Min)		
	With 8mA DC Bias		0.3-100MHz	0.3-30MHz	40MHz	50MHz	60-80MHz	100MHz		
MGSC-4803S	350	1CT:1	-1.0	-16	-14.4	-13.1	-12	-10		

## ▶ Electrical Specifications @25°C

Part Number	Common Mode Rejection (dB Min)			Cross Talk (dB Min)			Isolation HI-POT (Vrms) 60S
	30MHz	60MHz	100MHz	30MHz	60MHz	100MHz	
MGSC-4803S	-40	-35	-30	-40	-35	-33	1500

## ▶ MECHANICAL

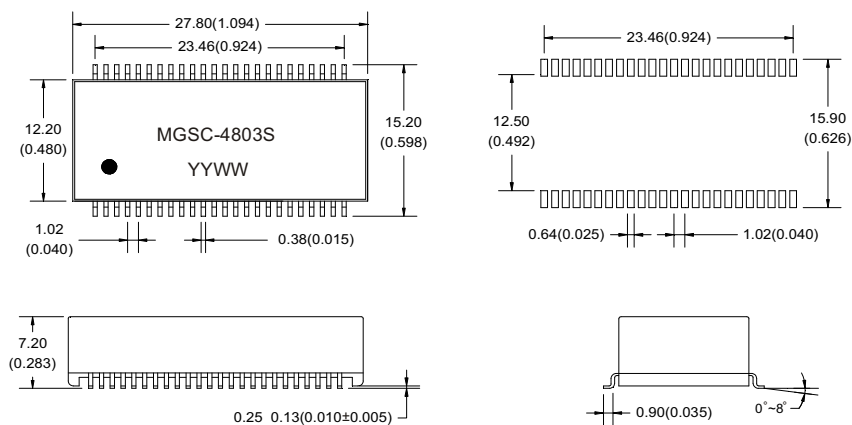

Dimensions: mm(inch)  
Unless otherwise specified, all tolerances are±0.25(0.010)

## ▶ SCHEMATICS

