

Features

- Small size and low profile.
- Filters a broad frequency range of common mode noise
- Excellent solder ability

General Specifications


- Storage temp range: -40°C to +125°C
- Operating temp range: -40°C to +125°C
- Temperature Rise: 40°C max. at I_{rms}

Applications

- CAN or CAN FD in automotive
- General industrial automation applications
- FlexRay automotive bus system




► Dimensions & Configurations (Unit:mm)

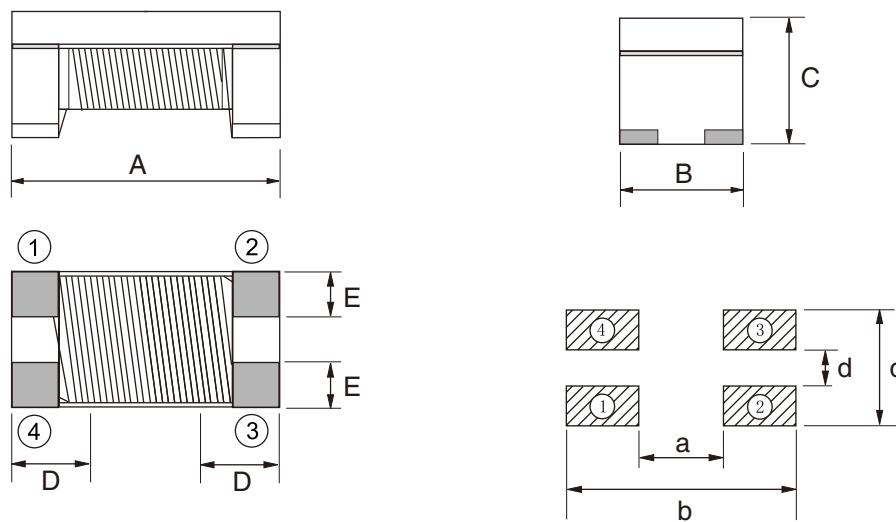

Recommend Land Pattern

Type	A±0.2	B±0.2	C±0.2	D(Typ)	E(Typ)	a	b	c	d
MSCZ322523L	3.2	2.5	2.3	0.7	0.9	2.0	3.7	2.5	0.6


► Schematic

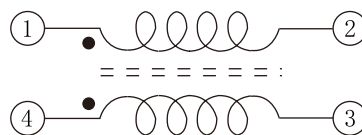


Electrical Characteristics For MSCZ322523L Series

Part Number	Inductance(uH) @100kHz/0.1V	Impedance @10MHz (Ω)		DCR Max. (mΩ)	I _{rms} Max. (mA)	Rated Voltage (V)	Insulation Resistance (MΩ) Min.
	50%/-30%	Min	Typ				
MSCZ322523L-110Y	11	300	550	300	400	50	10
MSCZ322523L-220Y	22	500	1100	500	300	50	10
MSCZ322523L-510Y	51	1000	2600	800	200	50	10
MSCZ322523L-101Y	100	2200	5100	1500	150	50	10

Typical Impedance vs. Frequency

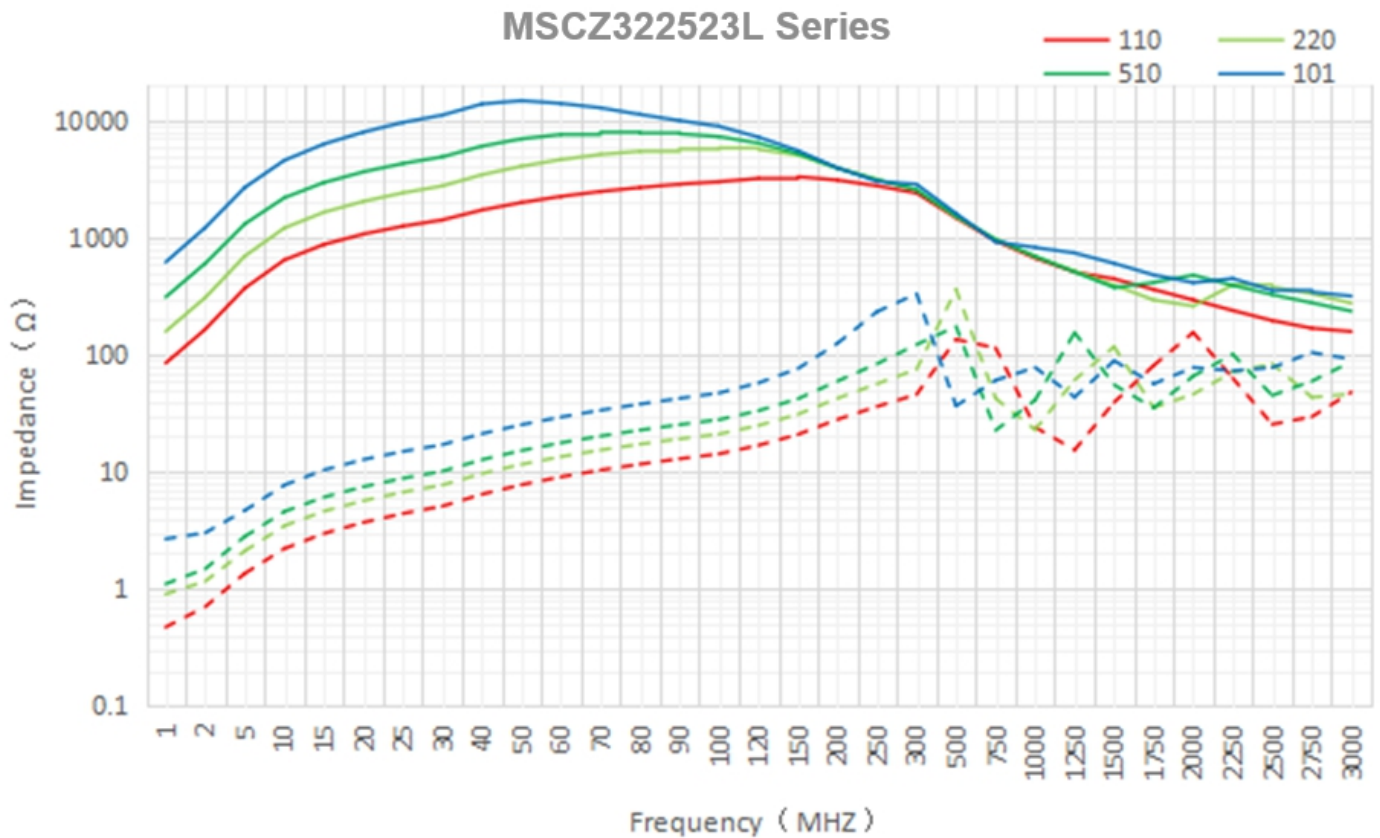


Tape & Reel Specifications:

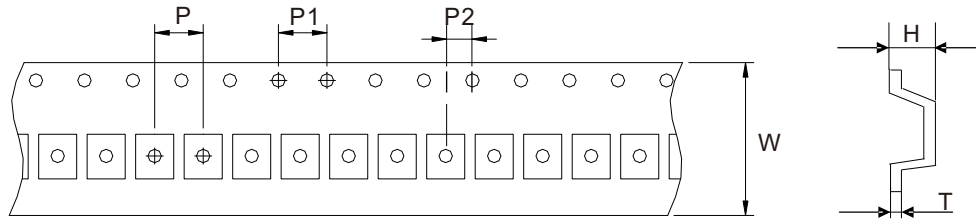

Unit: mm

Type	Dimension	W	P	P1	P2	H	T
	Tolerance	±0.3	±0.1	±0.1	±0.1	±0.15	±0.05
MSCZ322523L		8.0	4.0	4.0	2.0	2.55	0.26

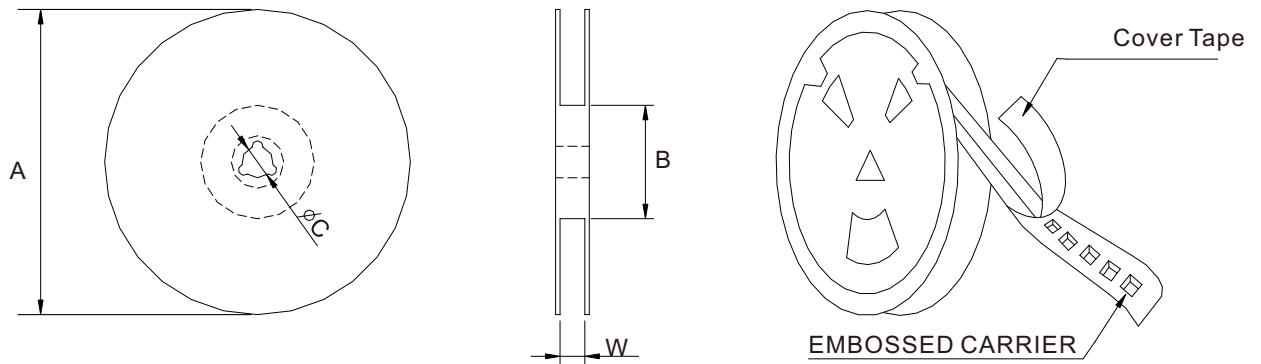

Unit: mm

Type	Dimension	QTY Per Reel	A	B	C	W
	Tolerance	PCS	±2.0	±0.5	±0.5	±0.5
MSCZ322523L		1500	178	60	13	9.5