

Features

- Small size and low profile.
- Filters a broad frequency range of common mode noise
- Excellent solder ability

General Specifications


- Storage temp range: -40°C to +125°C
- Operating temp range: -40°C to +125°C
- Temperature Rise: 40°C max. at I_{rms}

Applications

- CAN or CAN FD in automotive
- General industrial automation applications
- FlexRay automotive bus system




► Dimensions & Configurations (Unit:mm)

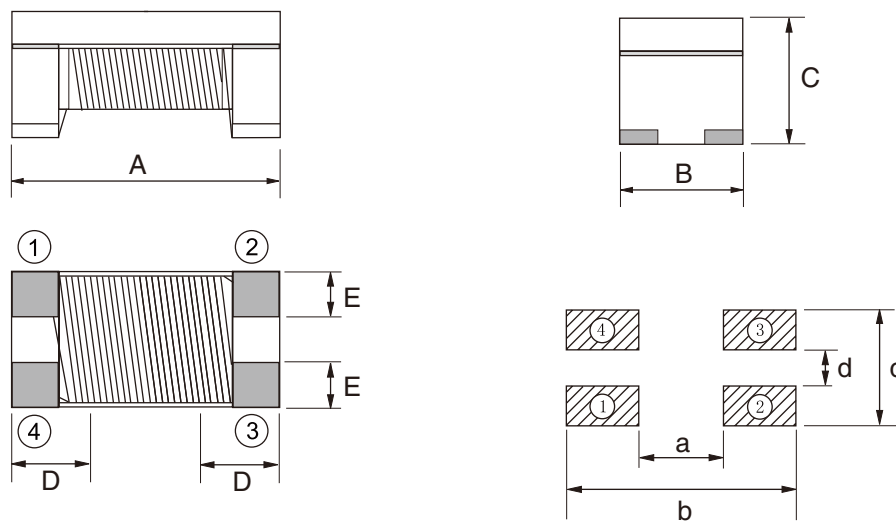

Recommend Land Pattern

Type	A±0.2	B±0.2	C±0.2	D(Typ)	E(Typ)	a	b	c	d
MSCZ453226L	4.5	3.2	2.6	0.7	0.9	3.0	5.9	3.4	1.6


► Schematic

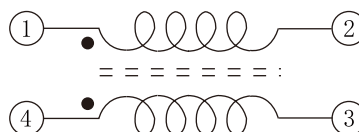


Electrical Characteristics For MSCZ453226L Series

Part Number	Inductance(uH) @100kHz/0.1V	Impedance @10MHz (Ω)		DCR Max. (mΩ)	Irms Max. (mA)	Rated Voltage (V)	Insulation Resistance (MΩ) Min.
	50%/-30%	Min	Typ				
MSCZ453226L-110Y	11	300	600	500	360	50	10
MSCZ453226L-220Y	22	500	1200	600	310	50	10
MSCZ453226L-510Y	51	1000	2800	1000	230	50	10
MSCZ453226L-101Y	100	2000	5800	2000	200	50	10

Typical Impedance vs. Frequency

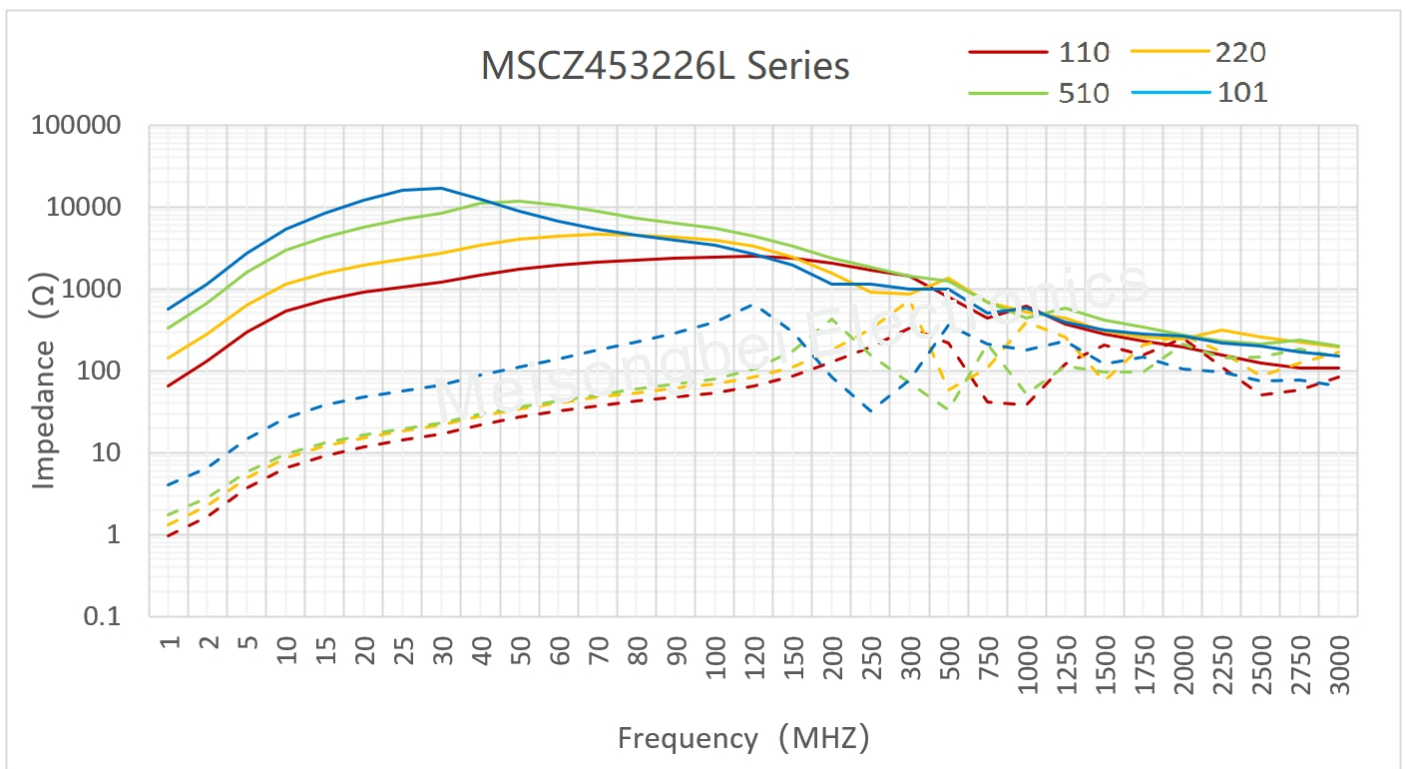


Tape & Reel Specifications:

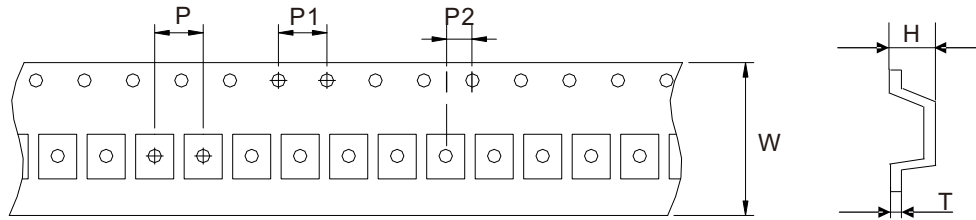

Unit: mm

Type	Dimension	W	P	P1	P2	H	T
	Tolerance	±0.3	±0.1	±0.1	±0.1	±0.15	±0.05
MSCZ453226L		12.0	8.0	4.0	2.0	3.00	0.30

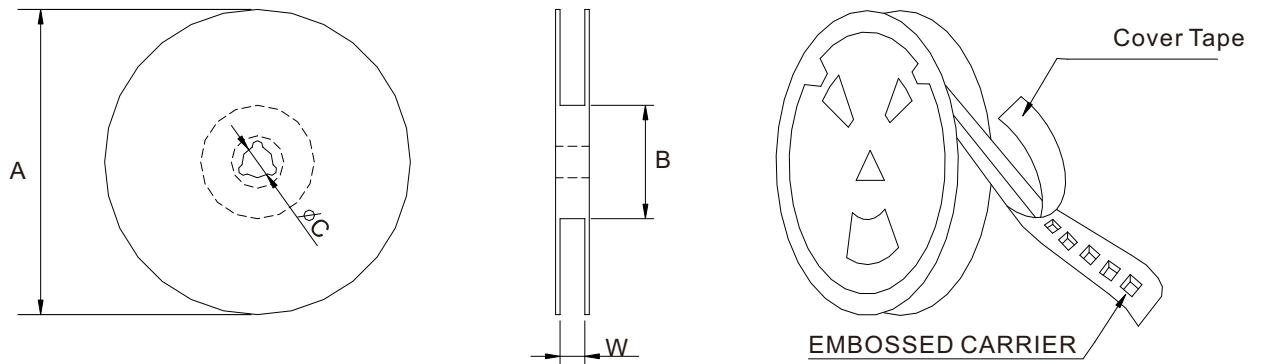

Unit: mm

Type	Dimension	QTY Per Reel	A	B	C	W
	Tolerance	PCS	±2.0	±0.5	±0.5	±0.5
MSCZ453226L		2000	330	97	13	12.8